



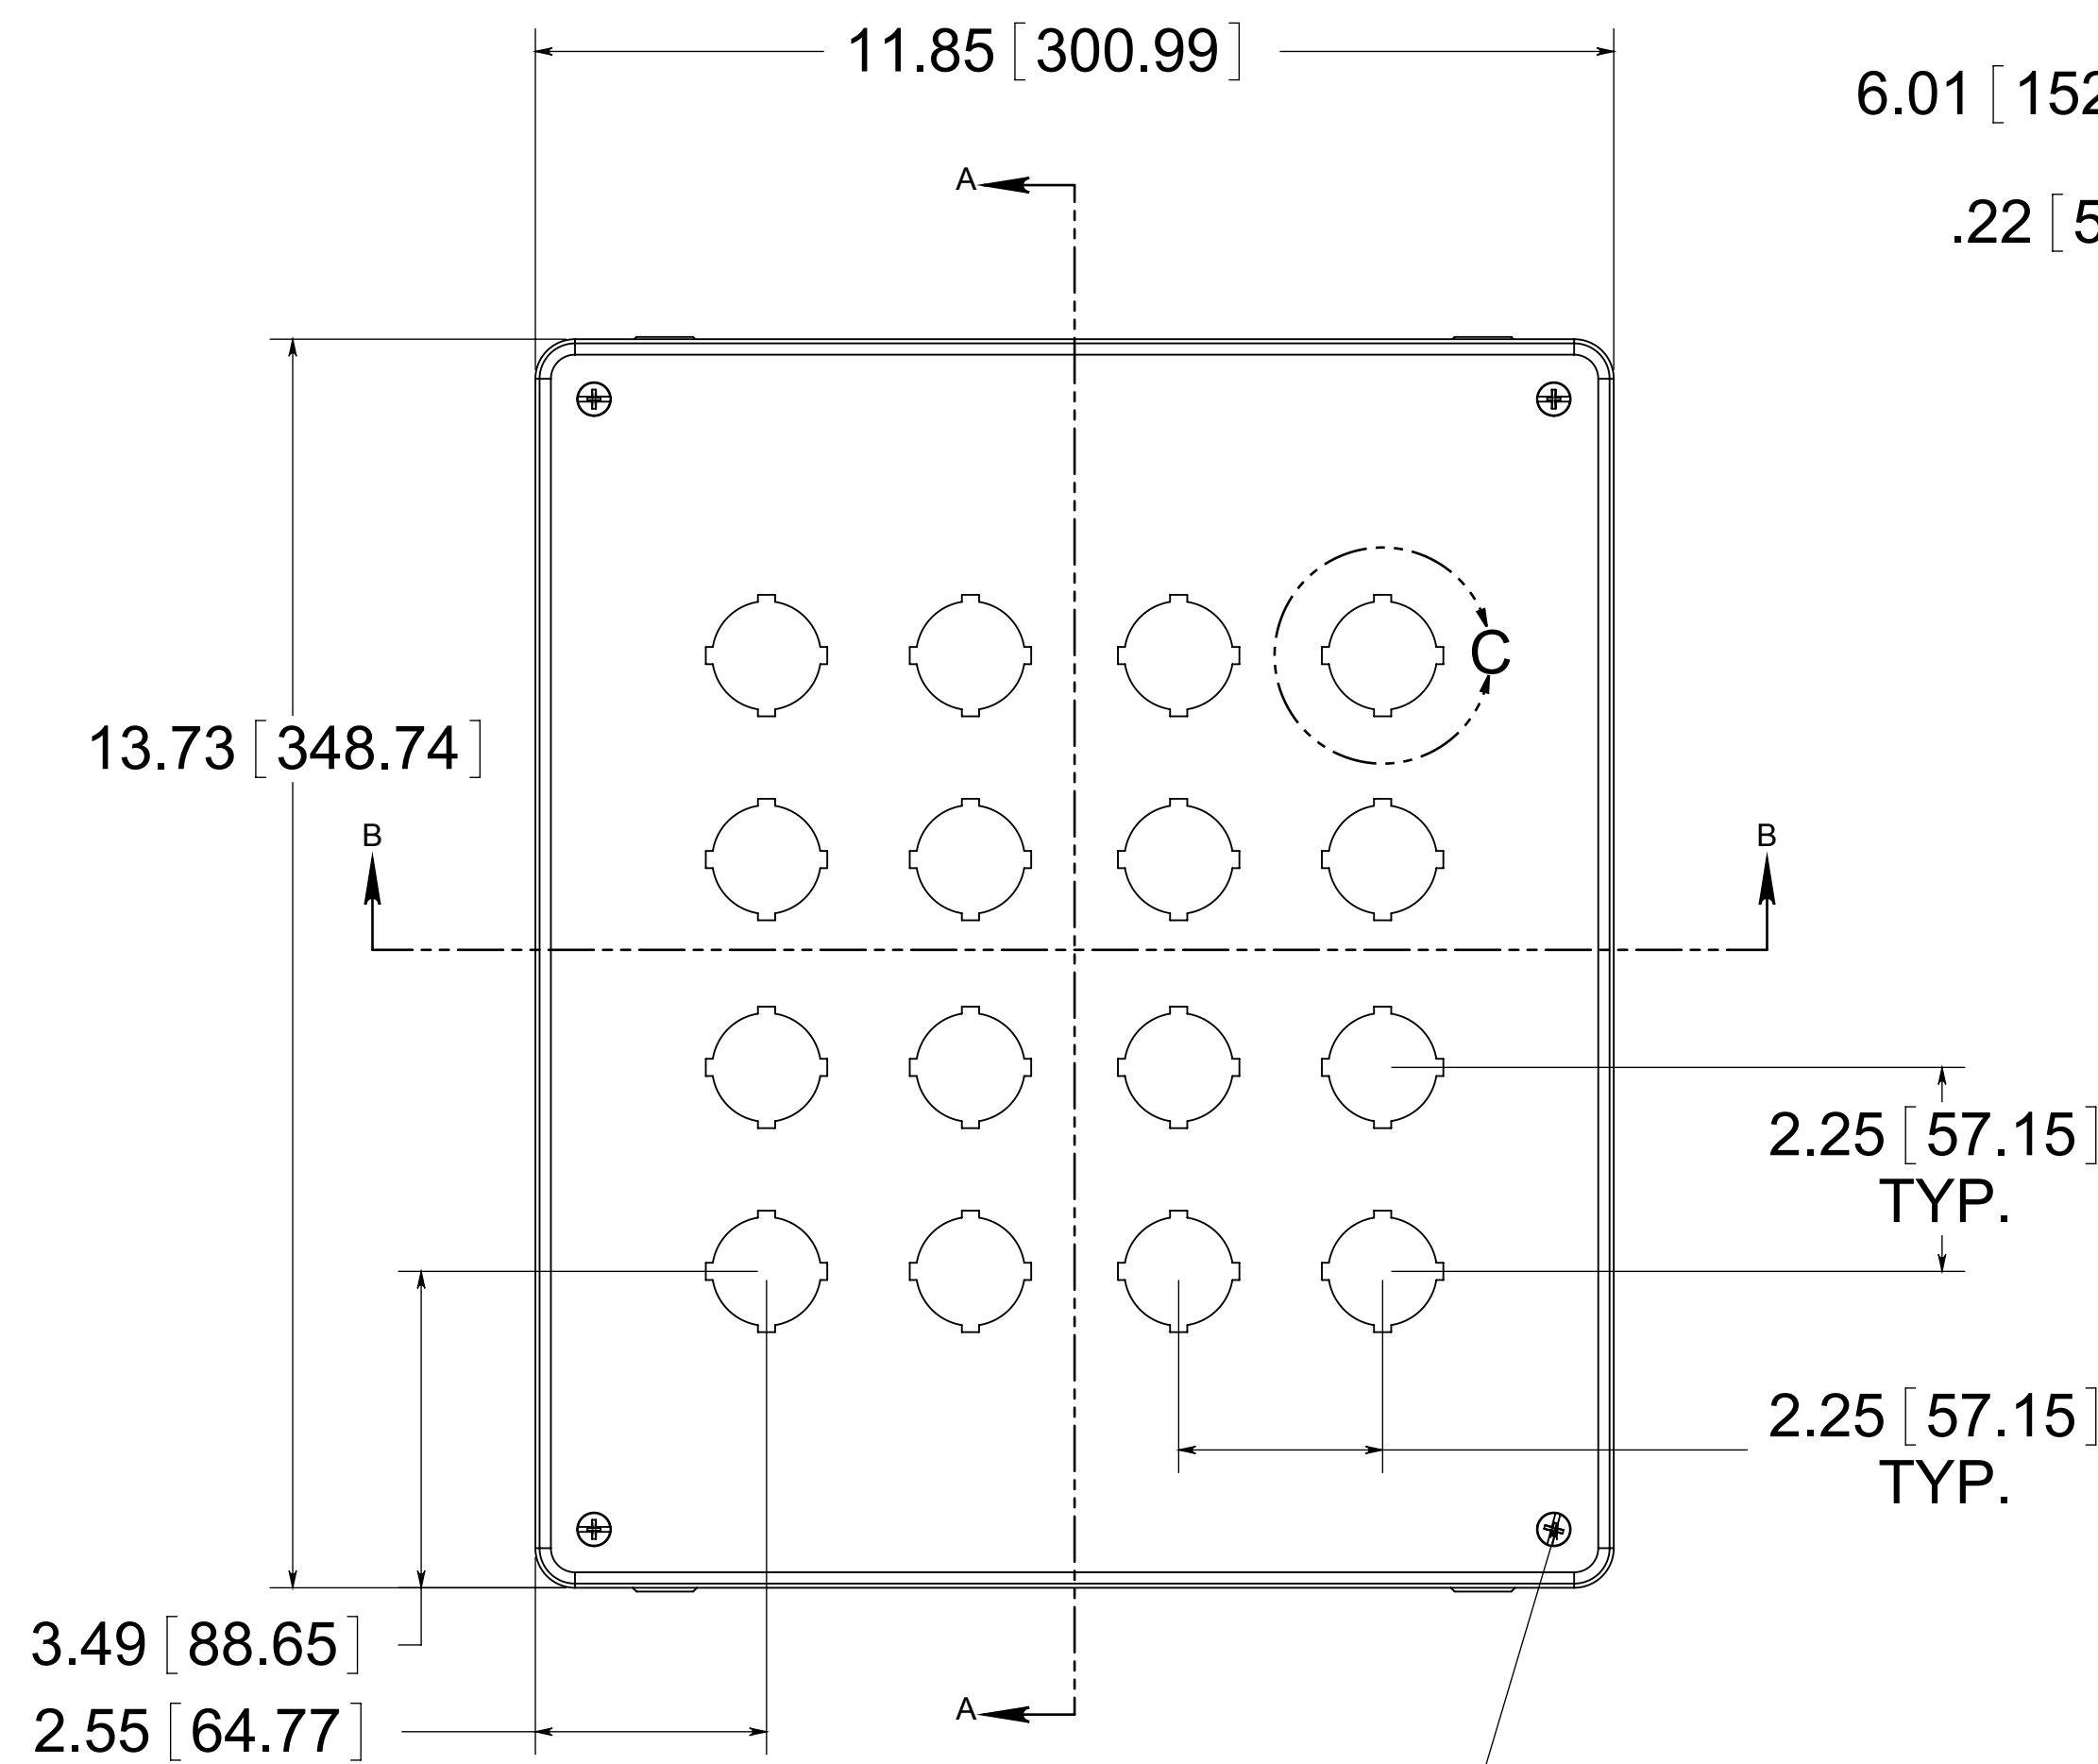

(4) EACH #10-32 BRASS INSERTS AND STAINLESS STEEL CAPTIVE COVER SCREWS WITH RETAINING O-RING

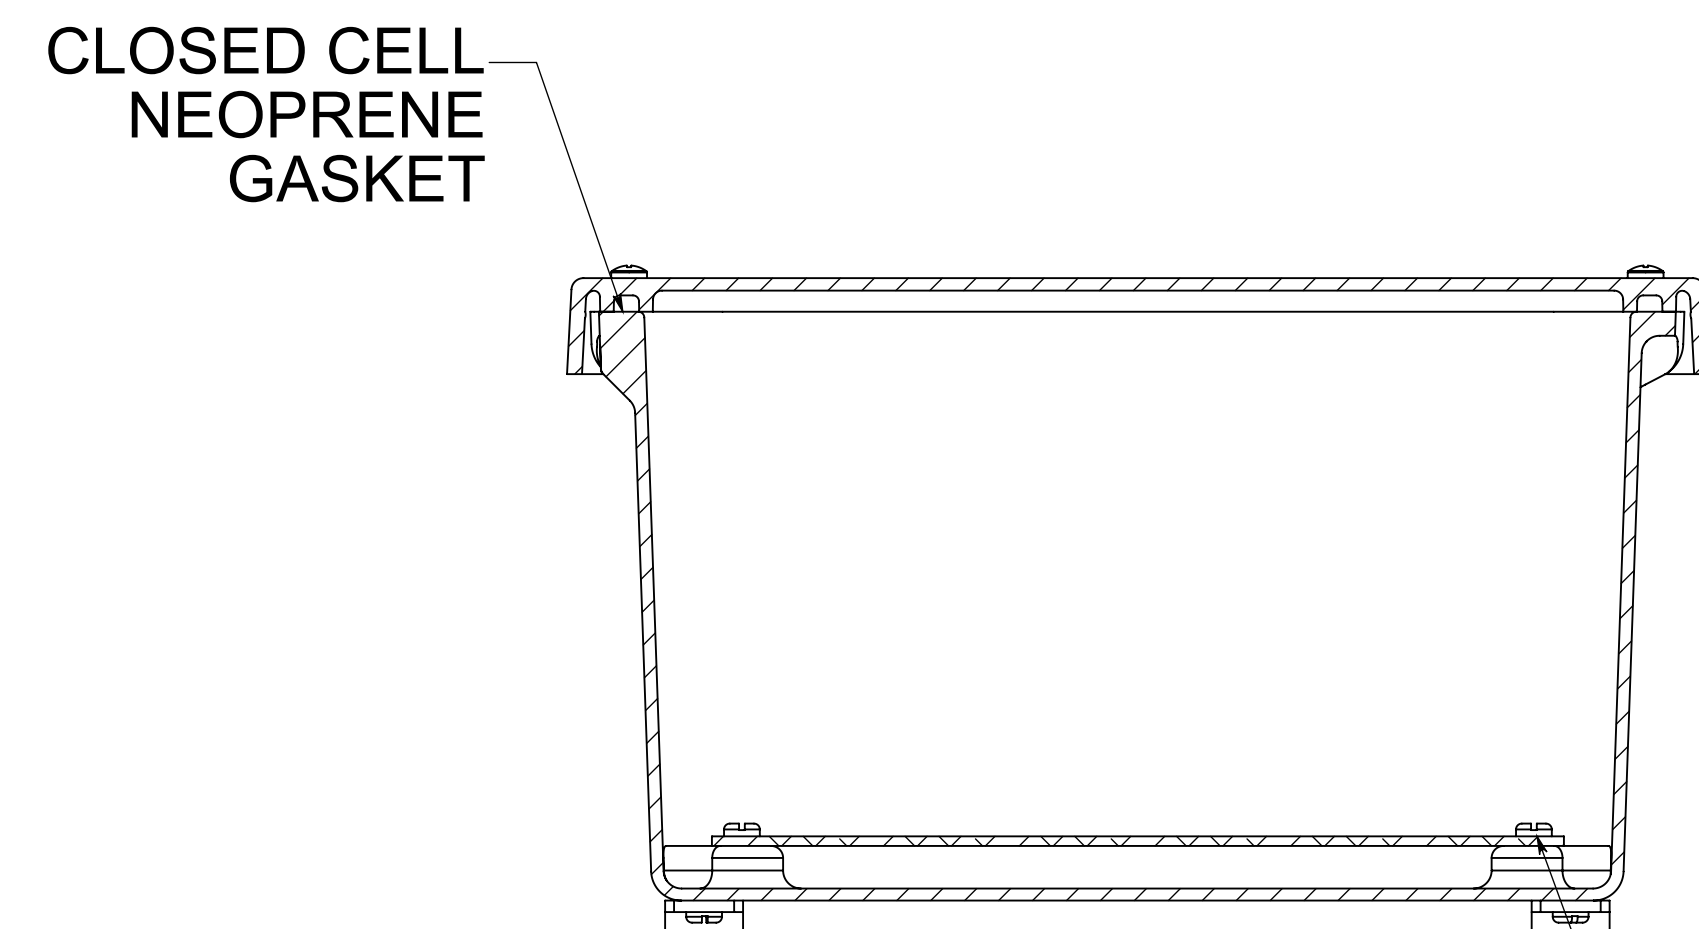


CLOSED CELL NEOPRENE GASKET

(4) EACH #10-32 BRASS INSERTS AND PLATED CARBON SCREWS

MATERIAL
BOX- COMPRESSION MOLDED FIBERGLASS REINFORCED POLYESTER
COVER- COMPRESSION MOLDED FIBERGLASS REINFORCED POLYESTER
WINDOWS- POLYCARBONATE

6.01 [152.61]
.22 [5.59]
OPTIONAL BACK PANEL
0.100 [2.54] TH'K- ALUMINUM
0.075 [1.91] TH'K- WHITE STEEL-GALVANNEALED
0.125 [3.18] TH'K- FIBERGLASS

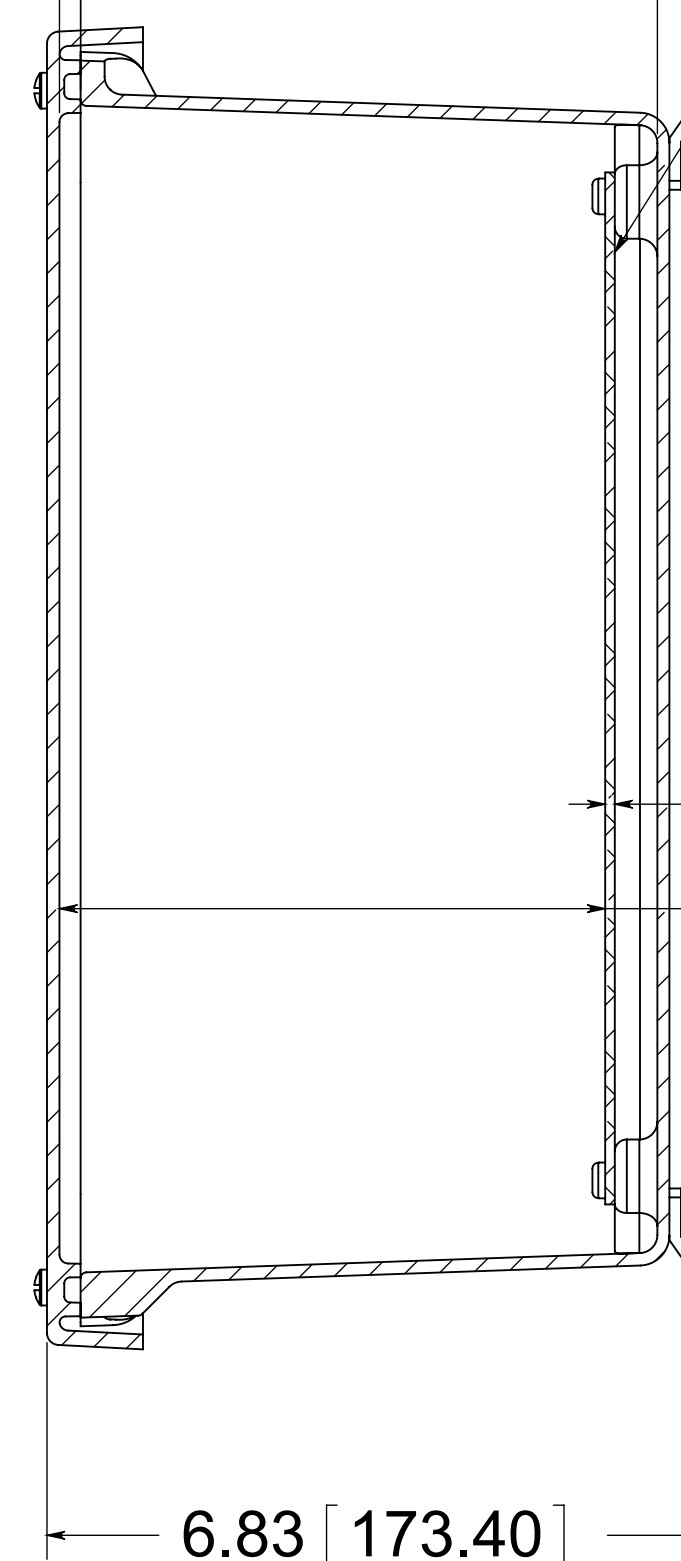


(4) STAINLESS STEEL MOUNTING FEET

(4) EACH #10-32 BRASS INSERTS, AND STAINLESS STEEL FEET SCREWS


.10 [2.54]
5.68 [144.39]

(4) ϕ .34 [8.74]

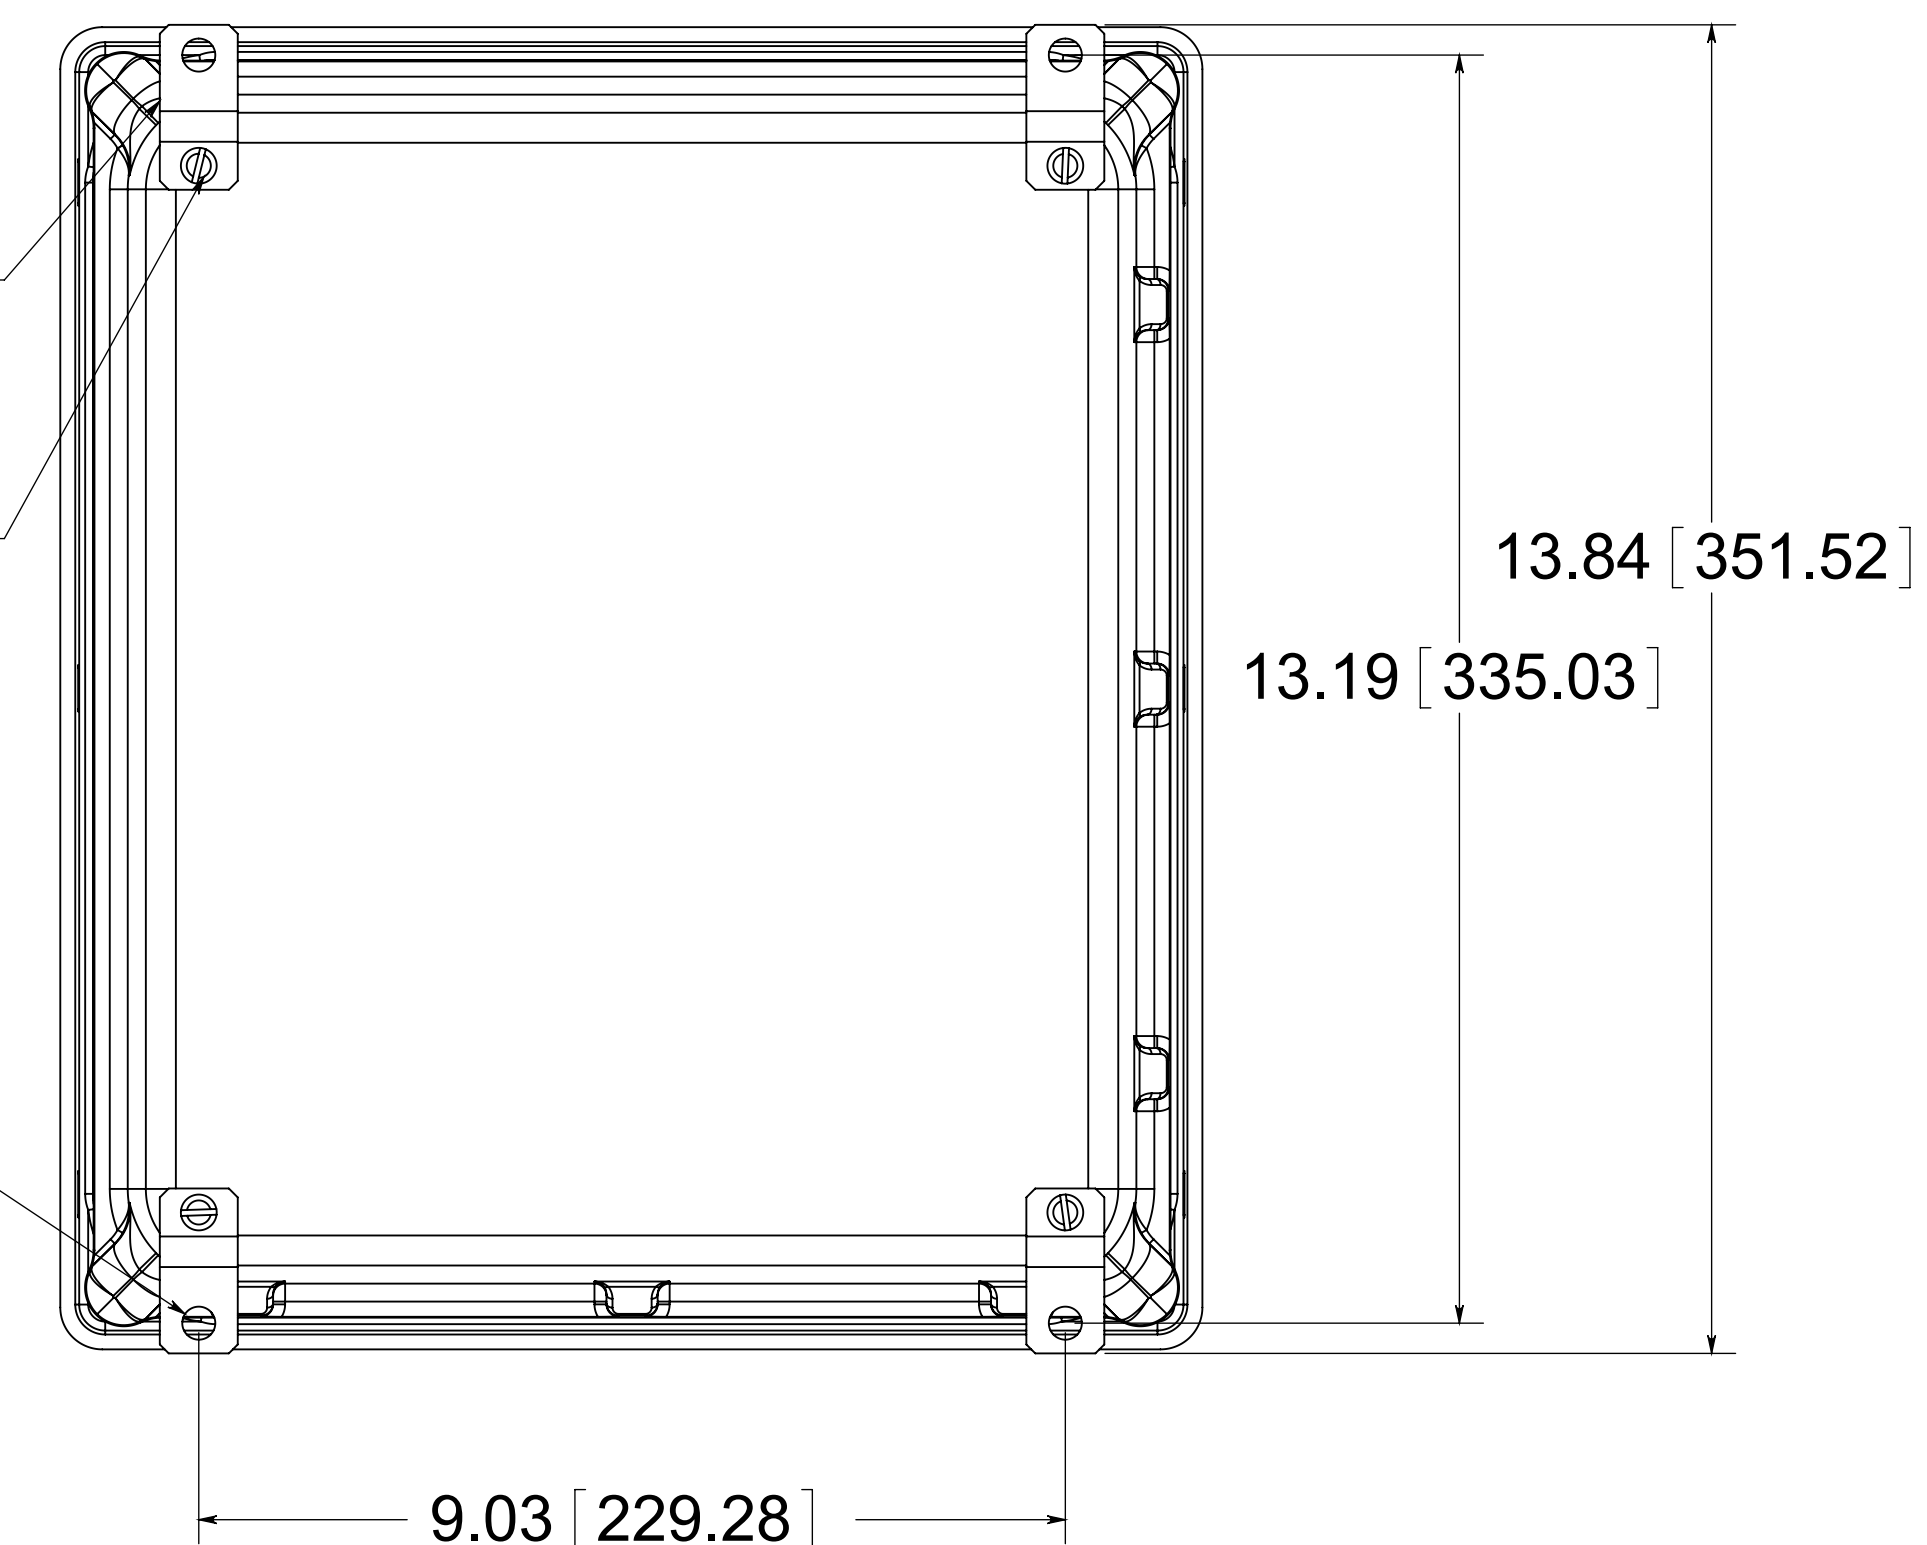

FRONT VIEW
WITH COVER REMOVED
AND BACK PANEL SHOWN

BACK VIEW

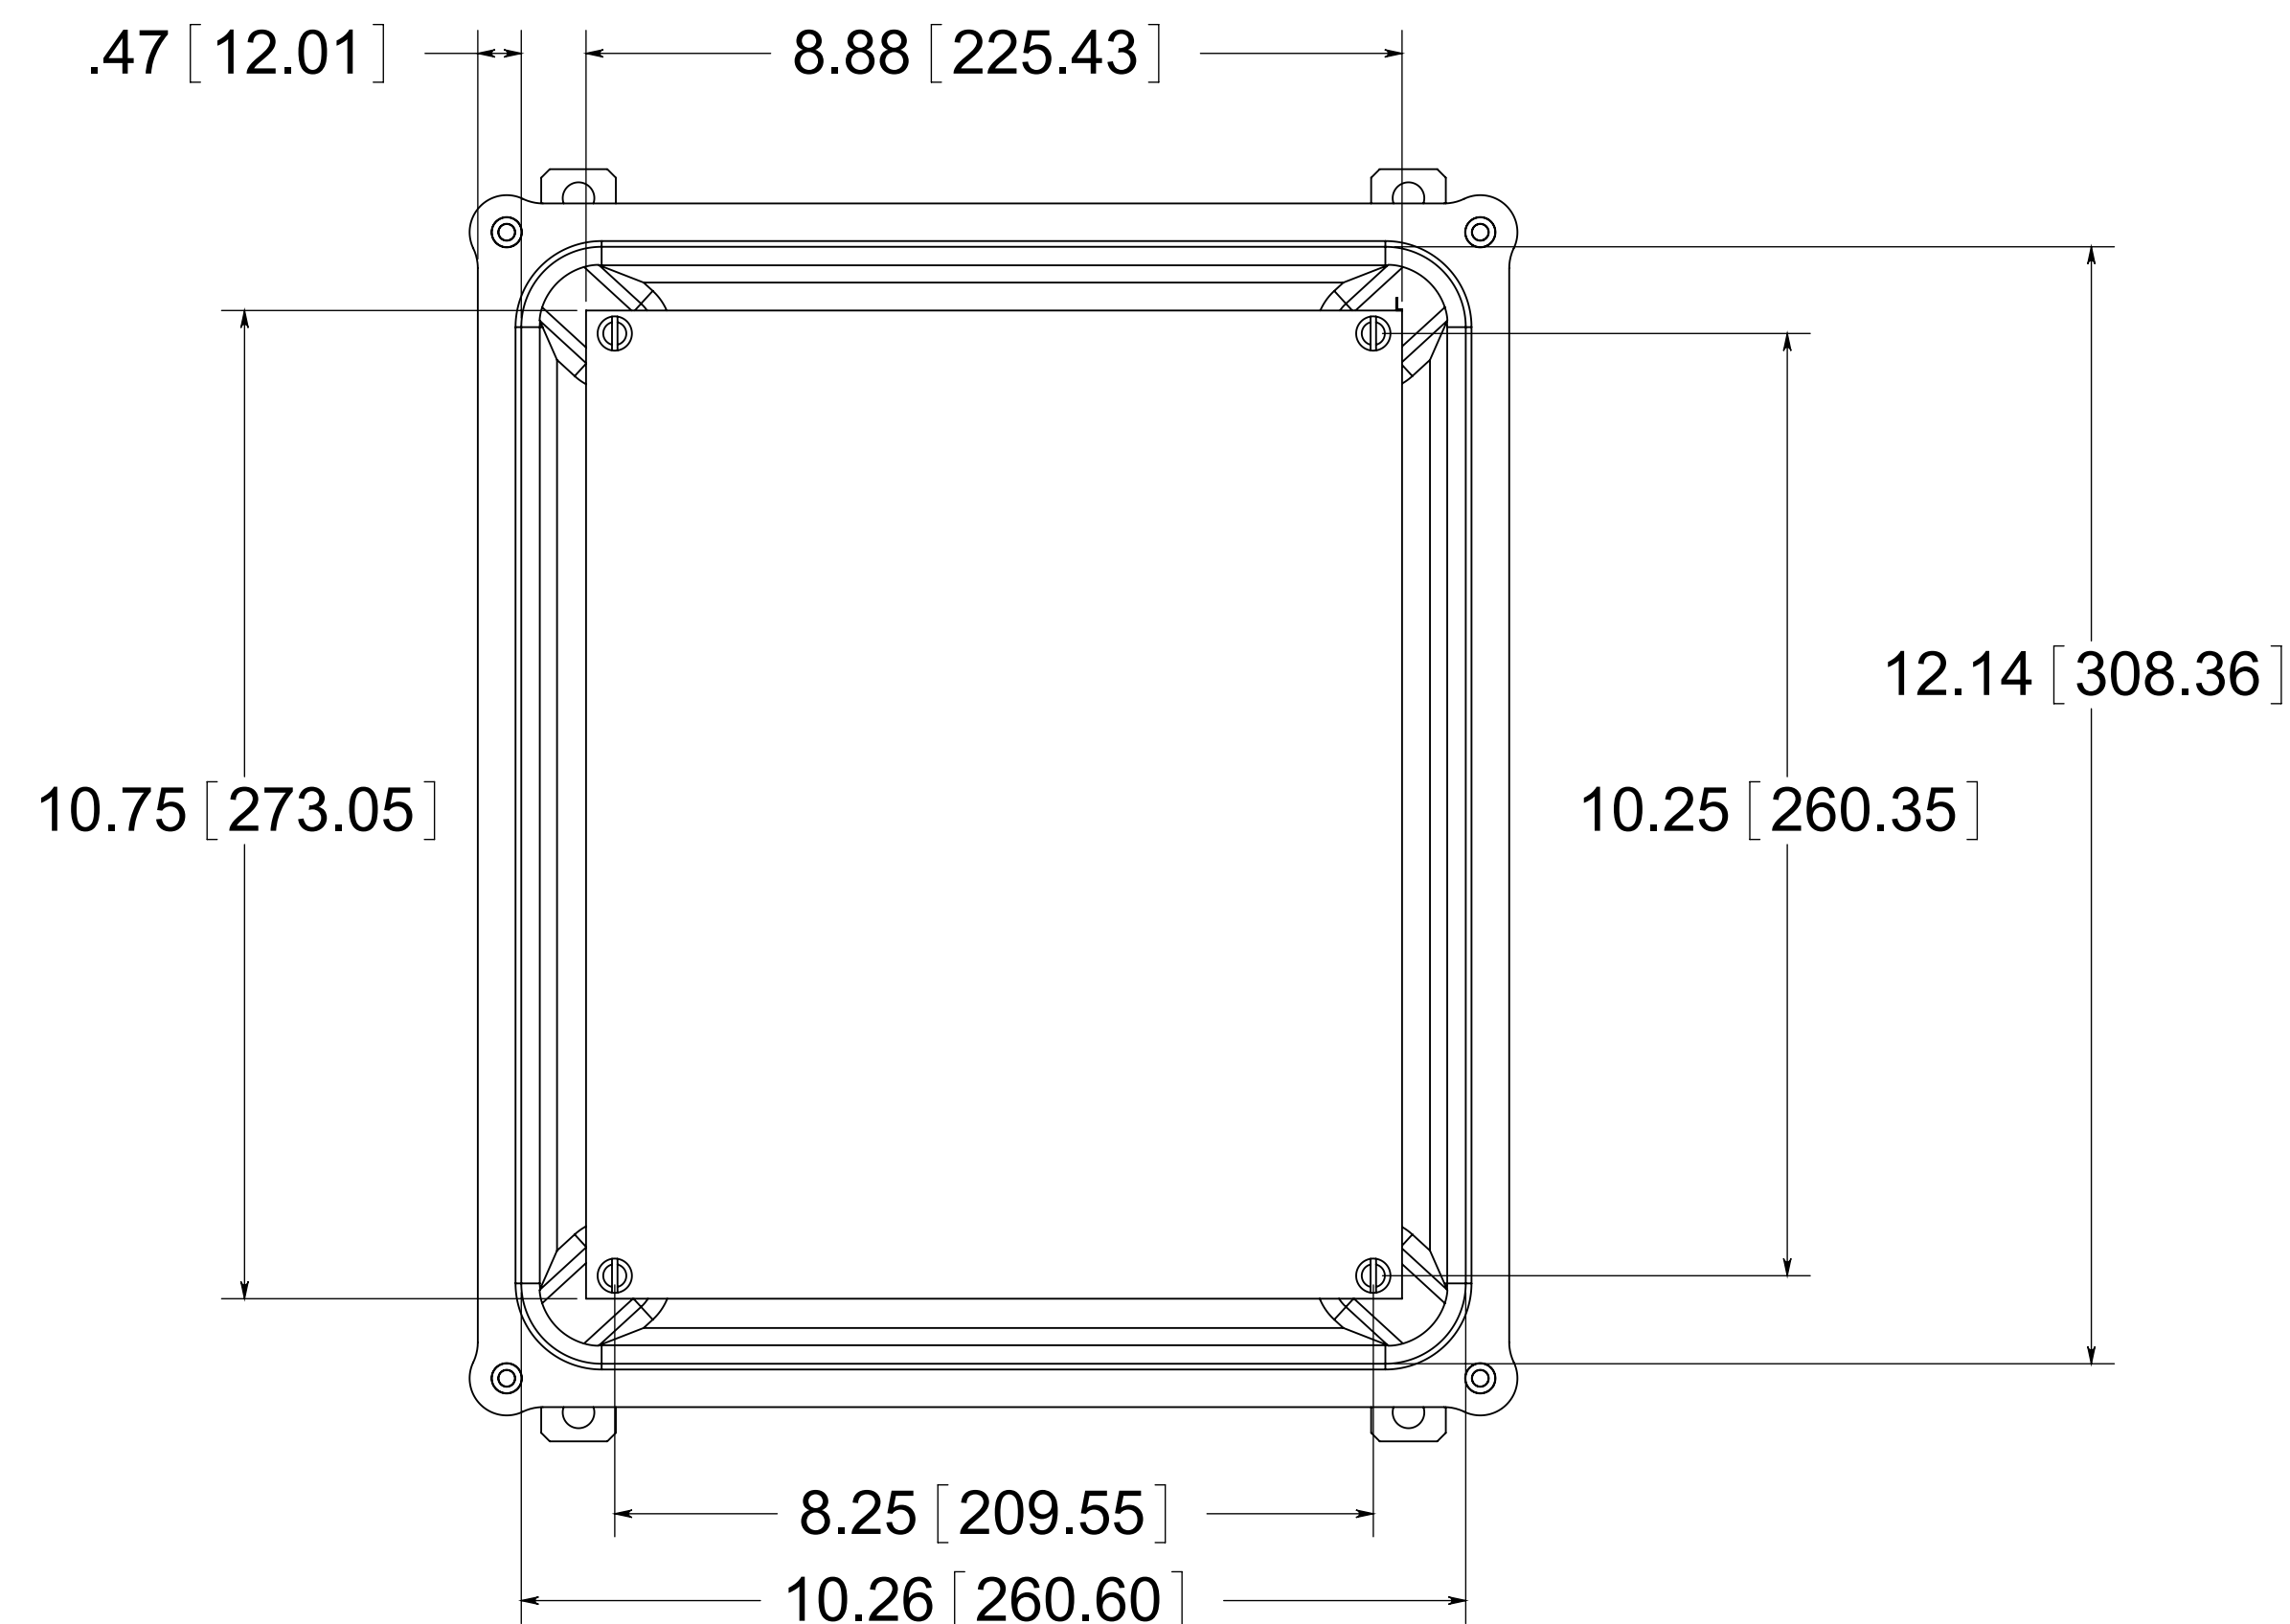

30.5mm HOLE
DETAIL

